


NOMENCLATURE	DESCRIPTION	PART NO.
C1, C2, C21, C14	CAPACITOR .2MFD 150 VOLT PAPER	18580
C3, C6	" .001MFD 500 " CERAMIC	18485
C5, C7, C8, C9	" .01MFD 400 " CERAMIC	18487
C10	" .10MFD 150 " ELECT.	18490
C11	" .25MFD 15 " "	18468
C12, C13	" .60MFD 150 " "	18491
C15	" .0001MFD 500 " CERAMIC	18493
C16, C17	" 0.0005MFD 500 " CERAMIC	18489
C18, C19	" .05MFD 150 " PAPER	18484
C4, C22	" .03MFD 150 " "	18588
C20	" .1MFD 150 " "	18585
C23	" .5MFD GOVERNOR CONDENSER	18637
C24	" .03MFD LINE FILTER	18661
R1, R4, R28	RESISTOR 5.6M 1/2 WATT CARBON	18464
R2, R3	" 2.2M 1/2 " "	18465
R30	" 10K 1/2 " "	17583
R6, R27	" 560K 1/2 " "	18467
R7, R9, R18, R34, R35	" 270K 1/2 " "	18468
R8	CONTROL VOLUME 1MEG OHM	18633
R10, R11, R13	RESISTOR 100K 1/2 WATT CARBON	18471
R12	" 2.2K 1/2 " "	18472
R15	CONTROL TONE 5K CARBON	18634
R16, R17	RESISTOR 470K 1/2 WATT CARBON	18474
R18	" 22K " "	18583
R19, R29	" 270 OHM 1/2 " "	18476
R20	" 10 " 1/2 " "	18477
R21, R5	" 27K 1/2 " "	18582
R22	" 1.8 MEG OHM 1/2 WATT CARBON	18436
R23	" 200 OHM 30 W.W.	18581
R24	" 350 " 30 " "	18582
R25	" 27K 1 " CARBON	18653
R26, R32	" 1500 OHM 1/2 WATT CARBON	18483
R31	" 60 OHM 40 WATT (GOVERNOR)	18658
R33	RHEOSTAT 60 OHM 25 WATT W.W.	18632
B1	PROJECTION LAMP 750 WATT	1595-115
F1	FUSE 1.5 AMP	17579
G1	GOVERNOR	18631
J1	PHONO - MIC JACK	18592
J2	SPEAKER JACK	18597
P1	FEMALE CONNECTOR	18594
P2	MALE CONNECTOR	18590
SW1, SW2	SWITCH ASSEMBLY	20319
SW3	SWITCH PART OF R8	
T1	OUTPUT TRANSFORMER	18643
T2	OSCILLATOR COIL	18641
T3	CHOKE	18540
T4	INPUT TRANSFORMER	18642
V1	PHOTO GELL	17572
V2	TUBE 6BH6	18495
V3	TUBE 12AX7	18497
V4, V5, V6	TUBE 50C5	18498
V7	EXCITER LAMP 4 VOLT 3/4 AMP	18460
V8	DRY DISK RECTIFIER	18499

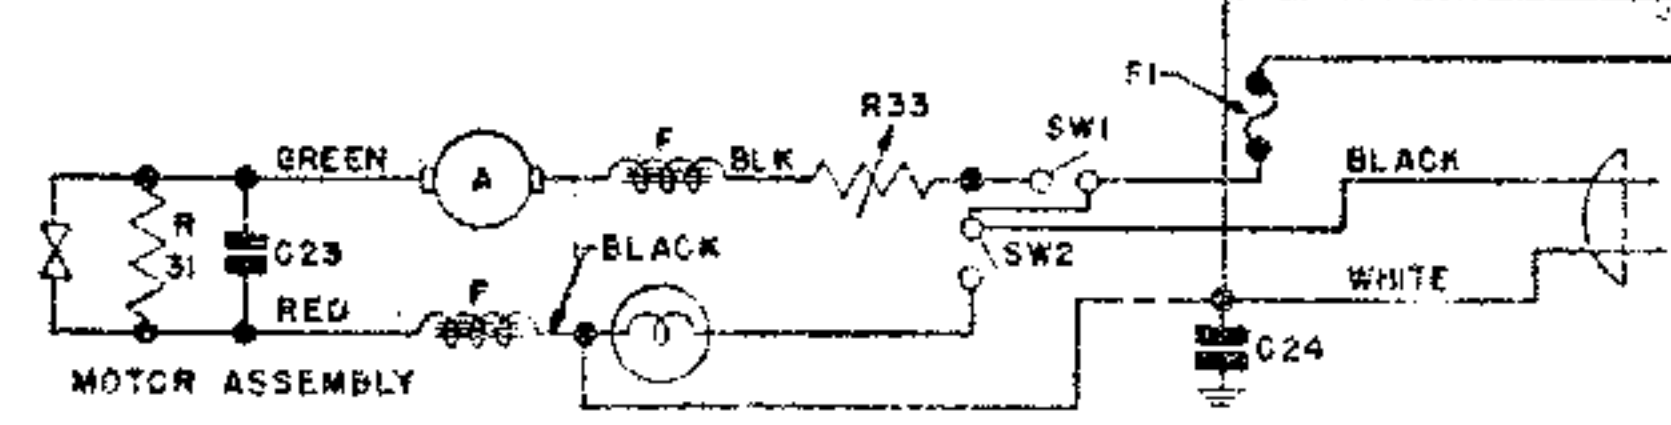

ENGINEERING DEPT. AMPRO CORPORATION CHICAGO	TITLE SCHEMATIC DIAGRAM DEVICE STYLIST PROJECTOR MODEL 472
REVISIONS	DATE JAN 20, 1949 SCALE
DESIGNED H.W.B.	DRG NO.
DRAWN A.C.C.	
CHECKED	D-10558